
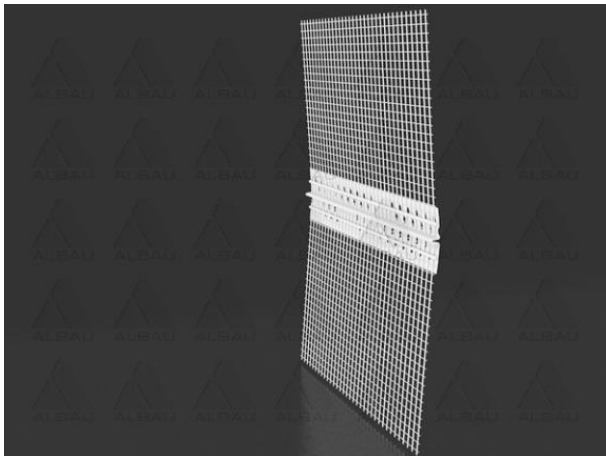


| | | |
|---|-------------------------------------|---------|
|  | ALBAU LTD | V 03 |
| | Product technical data sheet | v1 |
| | | Page 1 |
| | | Pages 1 |

ESD – Screed with glass fibre mesh



Application: Screed PVC for plaster finishing with glass fibre mesh. Universal profile that defines a dividing line of varicolored plasters on a single surface in insulation systems ETICS. Glass fibre mesh meet the ETAG 004 requirements.

Comply with ETICS insulation system

Advantages:

- The profile defines a dividing line of varicolored plasters on a single surface;
- Screed 6 with glass fibre mesh is applied as far as under the last plaster decorative layer.

Technical data:

| Product code | EAN | Material | Height | Length | Package |
|---------------|---------------|----------|--------|--------|---------|
| ALB-ESD-06-25 | 4751023400204 | PVC | 6 mm | 2,5 m | 50 pcs. |

Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place the temperature range of -5°C to +40°C. Maximum recommended storage time is 24 months



MADE IN EUROPE

Distributor: Ltd "Albau" – Ritvari, Rumbula, Stopinu district, LV-2121, Latvia. Reg.No. – 40103561205

www.albau.eu

www.xbau.eu