
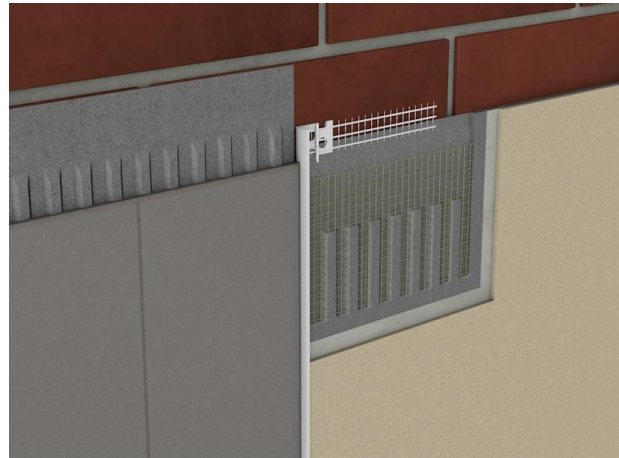


EST/ Stop profile with mesh

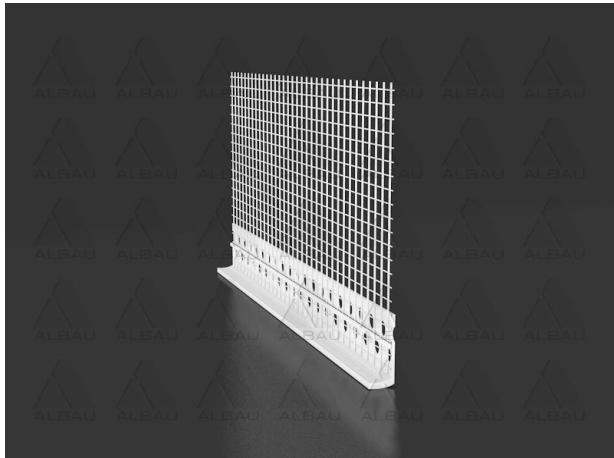

Application: Stop profile PVC with glass fibre mesh. Render stop profile is used for precise separation of coats of different structures and colors. It creates aesthetically connection between the plaster and the other construction elements in insulation systems ETICS. Appropriate for plasters with different thickness of laying – 3, 6, 10, 15 mm. Glass fibre mesh meet the ETAG 004 requirements.

Comply with ETICS insulation system

Advantages:

- Enables connection of colored plasters or paints;
- Enables time-differentiated plaster implementation;
- Reaching of an even plaster coating;
- Different variants according to plaster thickness

Technical data:

Product code	EAN	Material	Plaster thickness	Length	Package
ALB-EST-03-25	4751023400211	PVC	3 mm	2,5 m	25 pcs.
ALB-EST-06-25	4751023400288	PVC	6 mm	2,5 m	25 pcs.
ALB-EST-10-25	4751023400235	PVC	10 mm	2.5 m	25 pcs.
ALB-EST-15-20	4751023401652	PVC	15 mm	2.0 m	25 pcs.

Installation:

Larger plastered areas need to be divided into smaller sections using dilatations.

Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place the temperature range of -5°C to +40°C. Maximum recommended storage time is 24 months



MADE IN EUROPE

Distributor: Ltd "Albau" – Ritvari, Rumbula, Stopinu district, LV-2121, Latvia. Reg.No. – 40103561205

www.albau.eu

www.xbau.eu.